



Disassembling 2010-2014 Ford Mustang Center Console

This guide will explain how to disassemble the center console containing the stereo and climate controls.

Written By: Christopher Pell



INTRODUCTION

Whether for installing a new stereo system, or just for checking for disconnected wires, the center console of a car often needs to be removed. This guide will show you how to remove the center console of your Ford Mustang.



TOOLS:

- [7mm socket wrench](#) (1)
 - [Flathead Screwdriver](#) (1)
-

Step 1 — Center Console



- Open the rear part of the middle console.

Step 2




- Grip the right side of the console and pull up towards the passenger seat to remove it.

Step 3




- Locate the two bolts under the air conditioning controls at the bottom of the face plate.
- Loosen these two bolts with a basic socket wrench suited for 7mm bolts.

Step 4

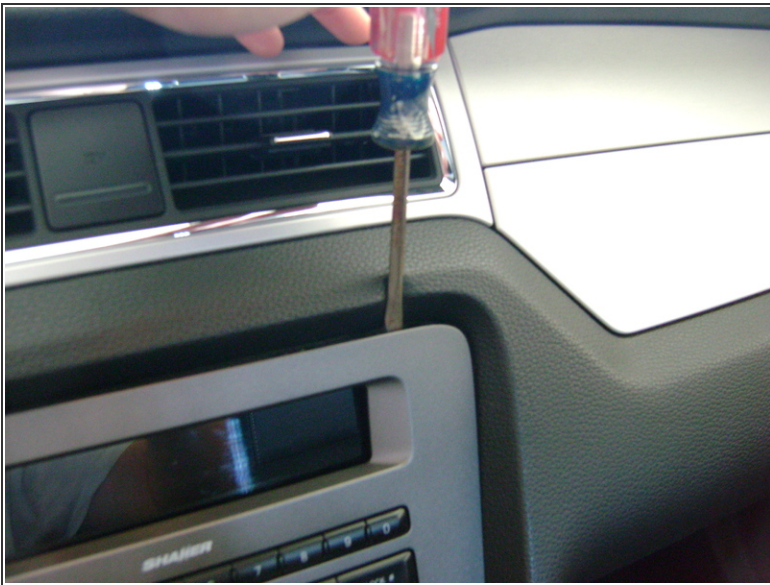

- Wedge a spudger or plastic opening tool (in place of the screwdriver shown) under the top of the face plate.
- Apply pressure until the corners "pop" out of place.

Step 5

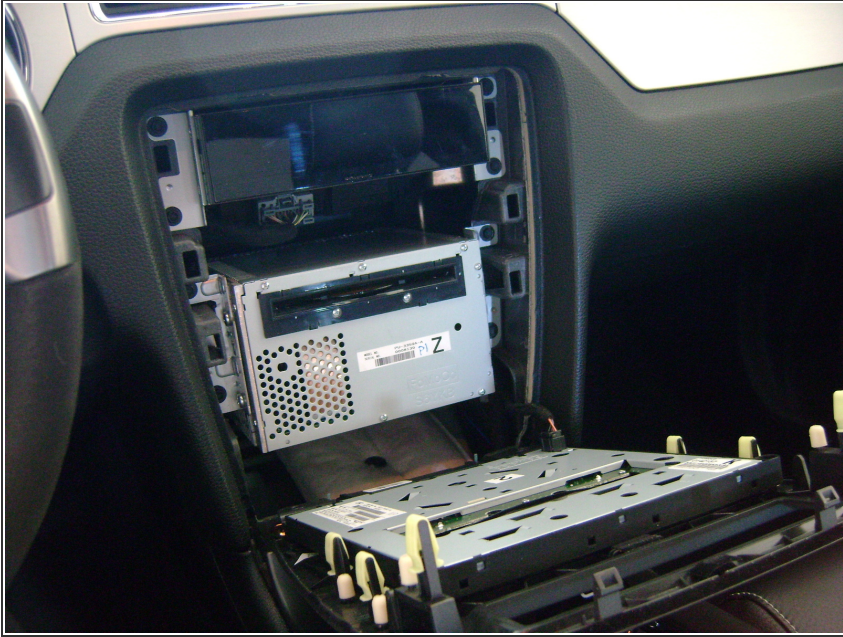

- Inspect the interior of the center console for damaged wires or other faulty components.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-10-21 07:31:10 AM.